



(19)

(11) Publication number:

60057938 A

Generated Document.

PATENT ABSTRACTS OF JAPAN

(21) Application number: 58165964

(51) Intl. Cl.: H01L 21/302

(22) Application date: 09.09.83


(30) Priority: (43) Date of application publication: 03.04.85 (84) Designated contracting states:	(71) Applicant: NEC CORP (72) Inventor: MORI KATSUMI MATSUI SHINJI ASATA SUSUMU (74) Representative:
---	--

(54) FORMATION OF MICROFINE PATTERN

(57) Abstract:

PURPOSE: To form a microfine pattern without being affected by the spreading of electrons due to scattering by etching a thin-film while using a high-molecular film consisting of a fluoride easy to be volatilized through the projection of electron beams as a resist.

CONSTITUTION: CF₄, CHF₃, etc. required for a high-molecular reaction in a reaction vessel 106 are diluted and forwarded into XeF₂ from an XeF₂ supply section 101. When the molecules of C and F adsorbed onto a substrate 105 are irradiated with electron beams 112 and ionized, and brought to a microplasma state, a high-molecular film composed of F and C changed into high molecules is formed on the substrate. When the high-molecular film 34 is evaporated by electron beams with a microfine diameter under an ultra-high vacuum, a pattern in approximately the same extent as the diameter of electron beams is formed. For example, a polysilicon thin-film 33 is etched in an atmospheric gas consisting of XeF₂ to shape the overhang of the high-molecular thin-film 34, a metallic film or semiconductor film 36 is evaporated, and the pattern 37 is formed on the substrate 105.

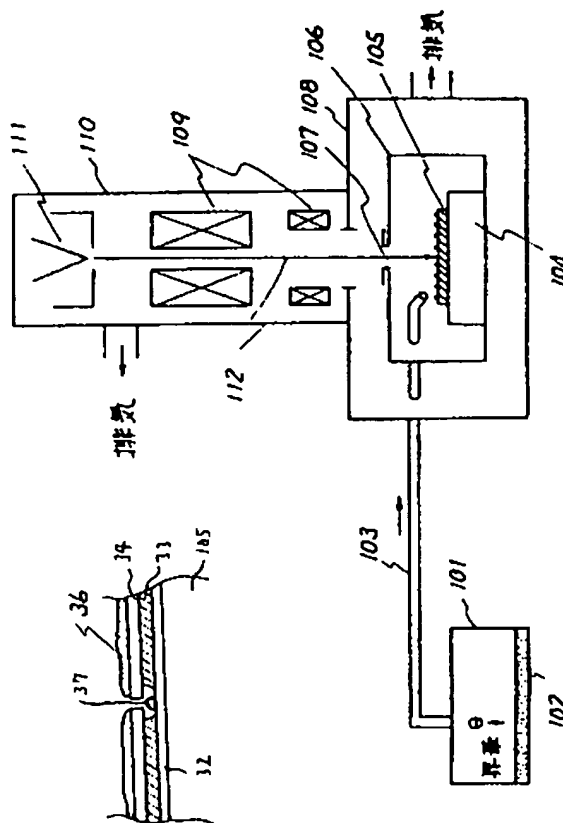

COPYRIGHT: (C)1985,JPO&Japio